


Dimensions in Inches, Tolerances: .XX ± .03 .XXX ± .010

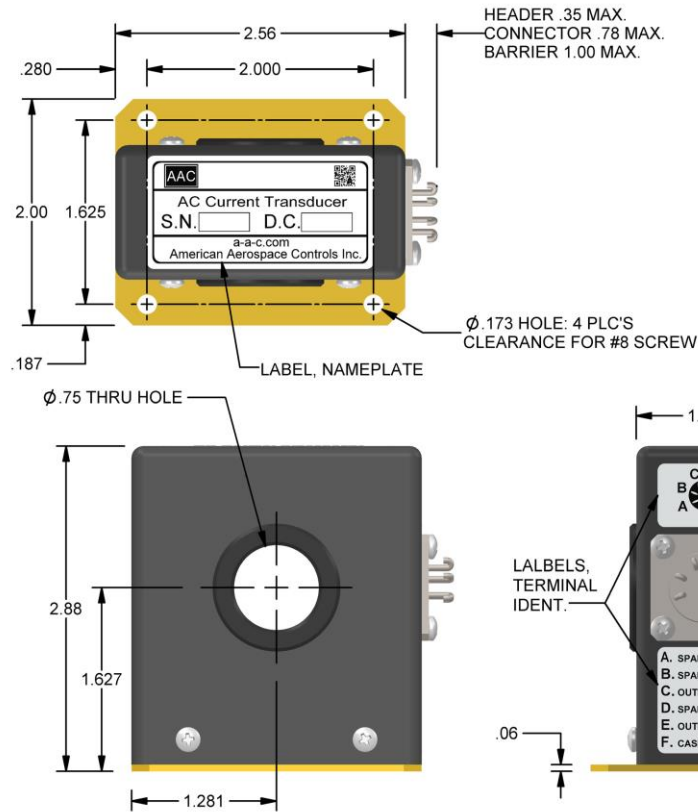

**A.C. CURRENT TRANSDUCER
SERIES 1004**

<u>PART NO.</u>	<u>INPUT CURRENT</u>	<u>OUTPUT IMPEDANCE</u>	<u>PART NO.</u>	<u>INPUT CURRENT</u>	<u>OUTPUT IMPEDANCE</u>
1004-2	0 TO 2	25	1004-150	0 TO 150	0.9
1004-5	0 TO 5	10	1004-200	0 TO 200	0.6
1004-10	0 TO 10	5.0	1004-250	0 TO 250	0.5
1004-20	0 TO 20	2.5	1004-300	0 TO 300	0.5
1004-50	0 TO 50	1.0	1004-350	0 TO 350	0.4
1004-100	0 TO 100	0.5	1004-400	0 TO 400	0.3

INPUT CURRENT

RANGE	Aac See Table
FREQUENCY	400Hz
FREQUENCY RANGE	375 to 475Hz
OVERLOAD	500Aac continuously

OUTPUT

VOLTAGE SIGNAL	0 to +5Vdc FS (Full Scale)
ACCURACY	± 0.5% FS (±25mV)
RESPONSE	150 m-sec typ.
RIPPLE	0.2% FS RMS
TEMPERATURE COEFFICIENT	±0.04% FS/°C max.
OUTPUT IMPEDANCE	K-Ohms max. See Table
REPEATABILITY	±0.1% FS
OUTPUT SIGNAL @ OVERLOAD	11Vdc typical

POWER SUPPLY (PS)

SUPPLY VOLTAGE	None, Self Excited
----------------	--------------------

ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	-55° to +85°C
STORAGE TEMPERATURE RANGE	-60° to +100°C
INSULATION RESISTANCE	100M-Ohms (Terminals A thru E to case & terminal F)
DIELECTRIC STRENGTH	350V RMS (Terminals A thru E to case & terminal F)
ALTITUDE	Operating sea level to 60,000 ft.
VIBRATION	Operating - 0.06 in D.A., 10 to 55Hz method 201 of MIL-STD-202
SHOCK	Operating 50g, 11m-sec half sine pulse method 213 Condition A of MIL-STD-202
MOISTURE RESISTANCE	Will meet method 106 of MIL-STD-202 and method 507.1 proc. 1 of MIL-STD-810
OPERATING HUMIDITY	0% to 95% RH
ATTITUDE	Unit will perform as specified when mounted in any position
WEIGHT	1.25 lbs. Max.

ORDERING INFORMATION

1004	- 10	- C
SERIES	CURRENT RANGE	TERMINATION
		Blank: Header
		B: Barrier
		C: Connector

TERMINAL IDENTIFICATION

- A. SPARE
- B. SPARE
- C. OUTPUT (RTN)
- D. SPARE
- E. OUTPUT (+)
- F. CASE GROUND

CONNECTOR OPTION

ADD "-C" TO PART NO.
CONNECTOR PART NO.
PT02E-10-6P-023 OR
PT02E10-6P OR EQUIV.

MATING CONNECTOR
PT06A-10-6S OR EQUIV

BARRIER OPTION

ADD "-B" TO PART NO.
TERMINAL "F"
NOT SUPPLIED

AAC	Drawing Number 1004	Rev. K
------------	--------------------------------	-------------------